




COCA

SALES, INC.

TYPE CC2-2 EIPS IWRC: Mechanical Spliced Two Leg Bridle Slings

Rated Capacity – US Tons

	Rope Dia. (")	RATED CAPACITY (Tons)			Alloy Oblong	Alloy Hook
					Dia. (")	WLL Tons
		60	45	30		
6x19 OR 6x36 EIPS IWRC	1/4	1.1	0.91	0.65	0.50	1
	5/16	1.7	1.4	1.0	0.50	1
	3/8	2.5	2.0	1.4	0.50	1 1/2
	7/16	3.4	2.7	1.9	0.75	2
	1/2	4.4	3.6	2.5	0.63	3
	9/16	5.5	4.5	3.2	0.875	5
	5/8	6.8	5.5	3.9	1.0	5
	3/4	9.7	7.9	5.6	1.0	7
	7/8	13	11	7.6	1.25	11
	1	17	14	9.8	1.50	11
	1 1/8	21	17	12	1.50	15
	1 1/4	26	21	15	1.75	15
	1 3/8	31	25	18	1.75	22
	1 1/2	37	30	21	2.0	22
	1 3/4	49	40	28	2.25	30
	2	63	52	37	2.5	37
	2 1/4	77	63	44	2.5	45
	2 1/2	94	77	54	2.75	60






COCA

SALES, INC.

TYPE CC2-3 EIPS IWRC: Mechanical Spliced Three Leg Bridle Slings

Rated Capacity – US Tons

	Rope Dia. (")	RATED CAPACITY (Tons)			Alloy Oblong	Alloy Hook
					Dia. (")	WLL Tons
		60	45	30		
6x19 OR 6x36 EIPS IWRC	1/4	1.7	1.4	0.97	0.75	1
	5/16	2.6	2.1	1.5	0.75	1
	3/8	3.7	3.0	2.2	0.75	1 1/2
	7/16	5.0	4.1	2.9	0.75	2
	1/2	6.6	5.4	3.8	1.0	3
	9/16	8.3	6.8	4.8	1.0	5
	5/8	10	8.3	5.9	1.0	5
	3/4	15	12	8.4	1.25	7
	7/8	20	16	11	1.5	11
	1	26	21	15	1.5	11
	1 1/8	31	26	18	2	15
	1 1/4	38	31	22	2	15
	1 3/8	46	38	27	2.25	22
	1 1/2	55	45	32	2.5	22
	1 3/4	74	60	42	2.75	30
	2	95	78	55	3	37
	2 1/4	116	94	67	3 1/2	45
	2 1/2	141	115	82	3 3/4	60






Rated Capacities based on design factor of 5.
Horizontal sling angles of less than 30° shall not be used.


COCA

SALES, INC.

TYPE CC2-4 EIPS IWRC: Mechanical Spliced Four Leg Bridle Slings

Rated Capacity – US Tons

	Rope Dia. (")	RATED CAPACITY (Tons)			Alloy Oblong	Alloy Hook
					Dia. (")	WLL Tons
		60	45	30		
6x19 OR 6x36 EIP	1/4	2.2	1.8	1.3	1/2"	1
	5/16	3.5	2.8	2.0	3/4"	1
	3/8	5.0	4.1	2.9	3/4"	1 1/2
	7/16	6.7	5.5	3.9	7/8"	2
	1/2	8.8	7.1	5.1	1"	3
	9/16	11	9.0	6.4	1"	5
	5/8	14	11	7.8	1.25	5
	3/4	19	16	11	1.5	7
	7/8	26	21	15	1.75	11
6x36 EIP	1	34	28	20	2.0	11
	1 1/8	42	34	24	2.25	15
	1 1/4	51	42	30	2.5	15
	1 3/8	62	50	36	2.75	22
	1 1/2	73	60	42	3 1/2"	22

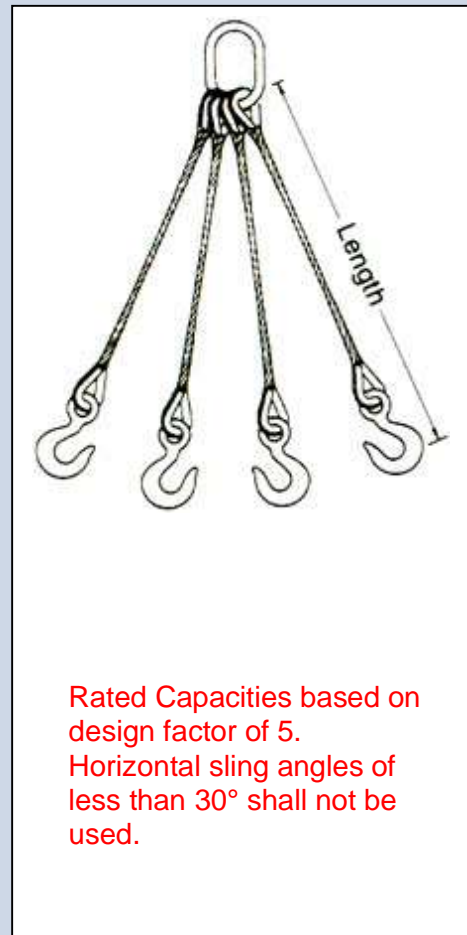

Larger sizes/diameters available.