

# SUSPENDED PERSONNEL PLATFORM


# **SUPER CAGE™**



**MODEL S-36**  
36" x 36" x 88"



**MODEL SR-7**  
36" O.D. x 88"  
Girder Dog not included

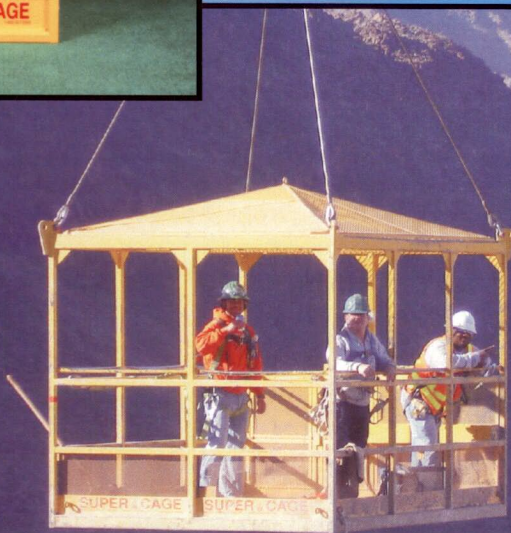

**MODEL S-60**  
36" x 60" x 88"



**MODEL S-100**  
51.5" x 51.5" x 88"  
w/expanded metal roof and test weight



**MODEL S-1000**  
84" x 84" x 88"



# **SUPER CAGE™**

Division of United States Crane, Inc.

1155 Central Florida Parkway

P.O. Box 593290

Orlando, FL 32859

407-859-6000

800-327-0300

Fax 407-857-9146

Pictures shown represent four of our twenty stock models





# MODELS AVAILABLE

MODEL	OUTSIDE DIMENSIONS			SAFE WORKING LOAD (SWL) CAPACITY	TEST WEIGHT LBS OPTIONAL
	L	W	H		
S-30	30"	30"	44/88"	600	750
S-36	36"	36"	44/88"	900	1,125
S-50	36"	48"	44/88"	900	1,125
S-60	36"	60"	44/88"	900	1,125
S-75	51.5"	51.5"	44/88"	900	1,125
S-100	51.5"	51.5"	44/88"	1,200	1,500
S-125	51.5"	58"	44/88"	1,500	1,875
S-150	51.5"	64"	44/88"	1,800	2,250
S-160	51.5"	96"	44/88"	1,800	2,250
S-170	51.5"	108"	44/88"	1,800	2,250
S-200	51.5"	72"	44/88"	2,400	3,000
S-400	72"	144"	44/88"	4,800	6,000
S-1000	84"	84"	44/88"	10,000	12,500
SR-5	-	18" DIA	88"	300	375
SR-7	-	36" DIA	88"	600	750
SNP-60	60"	60"	72"	1,000	N/A
SNP-603	60"	60"	60"	3,000	N/A
FL-50	36"	48"	44/63"	900	N/A
FL-160	36"	96"	44/63"	2,400	N/A

Supercages can be ordered in any size or shape to meet your specific applications. We also manufacture non-personnel, medical evacuation and welding equipment Supercages. Ask about our Supercage DFA (Direct Fixed Attached) personnel platforms (cages) which attach directly to the end of the boom on most cranes. DFA models do not require a bridle assembly.

## ALL SUPERCAGE PRODUCTS ARE DESIGNED TO INCORPORATE THE FOLLOWING AS STANDARD EQUIPMENT:

1. Removable components for easy maintenance and repairs
2. Construction-high strength steel square tubing
3. Door - inward swing, self-closing, self-latching (with outward stop plate)
4. Grab rail on entire inside perimeter
5. Anchors for personnel safety belts or body harness
6. Toe plate - entire inside perimeter
7. Expanded metal from floor deck to top of midrail
8. Floor - non-slip material
9. Exterior pad eyes for anchoring and tagline use
10. Eight (8) upper reinforcing gussets at bail area (for added strength)
11. Special warning decals and permanent metal ID plate
12. Painted with high durability, safety yellow finish
13. Operating manual furnished
14. Video for safe operation

## OPTIONS AVAILABLE AT ADDITIONAL COST

1. Easily detachable test weight assembly for load test procedure
2. 4 or 5-part wire rope lifting attachment (bridle)
3. Protective roof - expanded or solid metal
4. Fixed crosshead with lifting eye (for direct attach to hook)
5. Forklift attachment with safety restraint
6. Rubber bumpers on external perimeter
7. Tool/storage shelf (inside)
8. MSHA upper screens
9. Alternate paint colors and finishes

**CAUTION: PLATFORMS ARE TO BE USED ONLY IN COMPLIANCE WITH FEDERAL RULES AND REGULATIONS.**

**SUPERCAGE** products are designed, engineered, manufactured, and certified to meet or exceed all existing Federal and State codes, ASME B30.23, REV. 2005, Title 29CFR Part 1926.550(g), Crane and Derrick Suspended Personnel Platform. Inspection, load test and certification documents furnished.

**SUPERCAGE** - Div. of United States Crane, Inc.,

1155 Central Florida Parkway, P.O. Box 502200, Orlando, FL 32850, 407.850.6000, 800.337.0200, Fax: 407.857.0146